


Pop Up Classic White: Fiber Pole and Tie Down Diagram

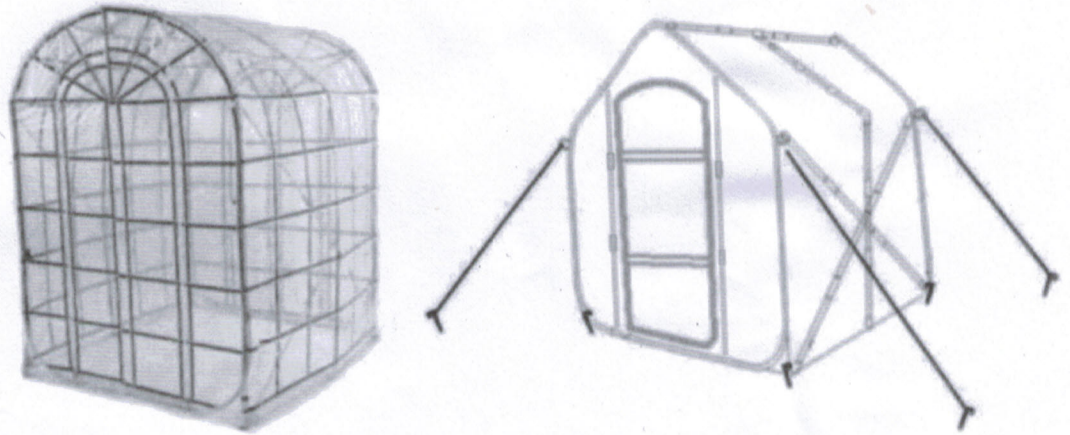

Step 1. Unpack FlowerHouse and accessories, allowing the spring steel bands to pop open

Step 2. Take fiber poles out of pack and assemble completely. Ensure poles are fully seated into each other. You will have four equal length poles form X in side walls, two poles that go besides doors , one with an + bracket and two L shaped poles for side center of side walls

Step 3. Install top roof pole (the single shorter pole with the “+ ” in the center) by inserting the pole into the pockets sewn inside the FloweHouse at the roof peaks.

(Hint: Fiber pole pockets may be obscured behind the spring steel bands. Pull the band away from the wall and insert fiber poles into pockets.)

Step 4. Install the X sidewall support poles by inserting the poles into the pockets sewn inside the FlowerHouse in each sidewall corner forming X Insert one pole at a time, diagonally to form an X in each wall.

Step 5. Install the L shaped poles into the center “+” bracket in the center of the roof. Insert the bottom end of the pole into the pocket at the center of the side wall at the floor, leaving the poles off center till both poles are both inserted. Once both poles are installed, push poles to the center.

Step 6. Two door poles fit either side of door to hold shape. Stake Greenhouse in location and install high wind tie downs (High wind tie downs must not be to tight.)

IMPORTANT: Buckle belts across doorway prior to zipping door to protect zippers.