




Modine's Infrared Line Provides Complete, Cost-Competitive Product Coverage

High-Intensity Gas-Fired Infrared Units.



| Model No. | BTU/HR | | Dimensions (inches) | | | Shipping Weight (lbs.) |
|-----------|---------|----------|---------------------|--------|--------|------------------------|
| | Natural | L.P. Gas | Height | Length | Width | |
| MT 28 | 27,500 | 27,500 | 9 | 17-1/4 | 23-3/4 | 30 |
| MT 30 | 30,000 | 30,000 | 9 | 17-1/4 | 23-3/4 | 30 |
| MT 33 | 33,500 | — | 9 | 17-1/4 | 23-3/4 | 30 |
| MT 56 | 55,000 | 55,000 | 9 | 24 | 23-3/4 | 40 |
| MT 60 | 60,000 | 60,000 | 9 | 24 | 23-3/4 | 40 |
| MT 66 | 67,000 | — | 9 | 24 | 23-3/4 | 40 |
| MT 84 | 82,500 | 82,500 | 9 | 30-3/4 | 23-3/4 | 48 |
| MT 90 | 90,000 | 90,000 | 9 | 30-3/4 | 23-3/4 | 48 |
| MT 99 | 100,500 | — | 9 | 30-3/4 | 23-3/4 | 48 |
| MT 112 | 110,000 | 110,000 | 9 | 37-3/4 | 23-3/4 | 59 |
| MT 120 | 120,000 | 120,000 | 9 | 37-3/4 | 23-3/4 | 59 |
| MT 132 | 134,000 | — | 9 | 37-3/4 | 23-3/4 | 59 |
| MT 160 | 160,000 | 160,000 | 9 | 37-3/4 | 23-3/4 | 59 |

Low-Intensity Gas-Fired Infrared Units. Indoor or Outdoor Types, Straight, L-Tube or U-Tube Models

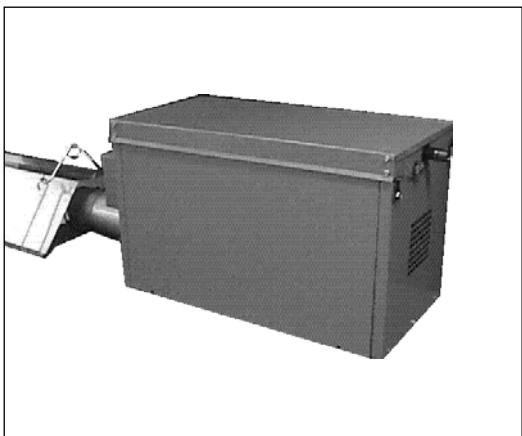

| Model No. | BTU/HR (Natural or L.P. Gas) | Tube Length (Feet) | Total Length (Feet) | Mounting Angle | Tube Diameter (Inches) | Vent Connection (Inches) |
|-----------|------------------------------|-------------------------|---------------------|----------------|------------------------|--------------------------|
| TLP 50 | 50,000 | 20, 30 | 23, 33 | 0°-45° | 4 | 4 |
| TLP 60 | 60,000 | 20, 30, 40 | 23, 33, 43 | 0°-45° | 4 | 4 |
| TLP 75 | 75,000 | 30, 40, 50 | 33, 43, 53 | 0°-45° | 4 | 4 |
| TLP 85 | 85,000 | 30, 40, 50 | 33, 43, 53 | 0°-45° | 4 | 4 |
| TLP 100 | 100,000 | 30, 40, 50 ^① | 33, 43, 53 | 0°-45° | 4 | 4 |
| TLP 125 | 125,000 | 40, 50, 60 | 43, 53, 63 | 0°-45° | 4 | 4 |
| TLP 150 | 150,000 | 50, 60, 70 ^② | 53, 63, 73 | 0°-45° | 4 | 4 |
| TLP 175 | 175,000 | 50, 60, 70 ^② | 53, 63, 73 | 0°-45° | 4 | 4 |
| TLP 200 | 200,000 | 50, 60, 70 ^② | 53, 63, 73 | 0°-45° | 4 | 4 |

① Contact factory for L.P. Gas operation at 50 ft. tube system length.

② Contact factory for L.P. Gas operation at 70 ft. tube system length

NOTE: CSA Approved Indoor/Outdoor, Vented or Unvented

INDOOR AIR SOLUTIONS

Low-Intensity Gas-Fired Infrared Units. Vacuum Type, Straight or U-Tube Models



| Model No. | BTU/HR (Natural Gas Only) | Tube Length (Feet) | Total Length (Feet) | | Weight (lbs.) |
|-----------|---------------------------|--------------------|---------------------|--------|---------------|
| | | | Straight | U-Tube | |
| MV 75 | 75,000 | 20 | 23 | 13 | 120 |
| MV 75 | 75,000 | 30 | 34 | 18 | 145 |
| MV 100 | 100,000 | 30 | 34 | 18 | 145 |
| MV 75 | 75,000 | 40 | 44 | 23 | 220 |
| MV 100 | 100,000 | 40 | 44 | 23 | 220 |
| MV 125 | 125,000 | 40 | 44 | 23 | 220 |
| MV 150 | 150,000 | 40 | 44 | 23 | 220 |
| MV 75 | 75,000 | 50 | 54 | 28 | 250 |
| MV 100 | 100,000 | 50 | 54 | 28 | 250 |
| MV 125 | 125,000 | 50 | 54 | 28 | 250 |
| MV 150 | 150,000 | 50 | 54 | 28 | 250 |
| MV 125 | 125,000 | 60 | 64 | 33 | 270 |
| MV 150 | 150,000 | 60 | 64 | 33 | 270 |



Commercial HVAC&R Division
Modine Manufacturing Company
1500 DeKoven Avenue
Racine, WI 53403-2552
Call: 1.800.828.HEAT
Fax: 262.636.1665
www.modine.com